
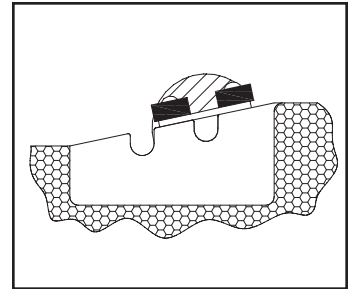
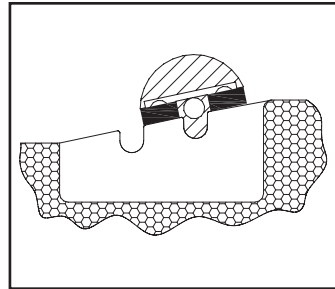
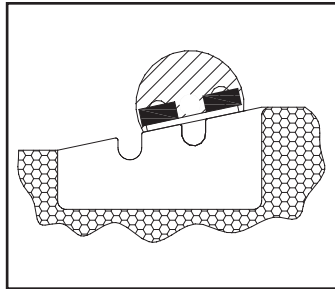


Roller Adjustment for EZ Port I, II, & III

During installation it may be necessary to adjust the rollers on your new EZ Port. Your EZ Port can be adjusted to fit most personal watercraft (PWC). Each roller is adjustable and can be placed in one of eight positions. The illustrations below show each of the eight positions. Rollers placed too high will cause your PWC to tip to one side. Rollers placed too low will cause your PWC to be difficult to launch and dock. Your EZ Port is designed to make launching and docking fast, fun, and easy.

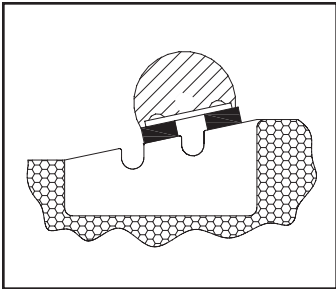

1 Position

- A. Upper Roller Tray
- B. Axle Plate Down
- C. Spacers Below Plate

2 Position





- A. Upper Roller Tray
- B. Axle Plate Down
- C. Spacers Above Plate

3 Position

- A. Upper Roller Tray
- B. Axle Plate Up
- C. Spacers Below Plate

4 Position

- A. Upper Roller Tray
- B. Axle Plate Up
- C. Spacers Above Plate

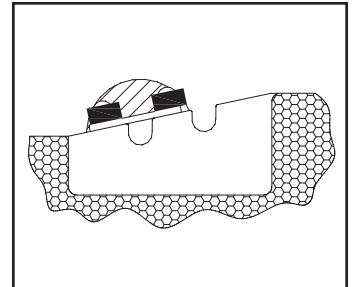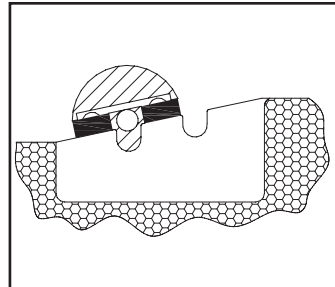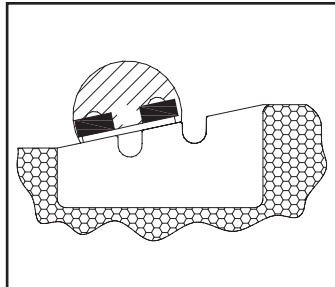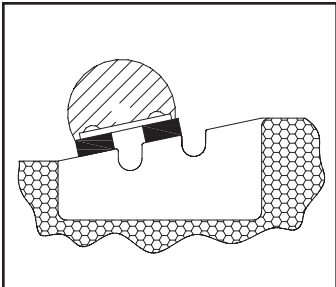

5 Position

- A. Lower Roller Tray
- B. Axle Plate Down
- C. Spacers Below Plate

6 Position

- A. Lower Roller Tray
- B. Axle Plate Down
- C. Spacers Above Plate

7 Position

- A. Lower Roller Tray
- B. Axle Plate Up
- C. Spacers Below Plate

8 Position

- A. Lower Roller Tray
- B. Axle Plate Up
- C. Spacers Above Plate